









Cocco HYB–77101 Matt Embossed Surface

HYB-77102



Freddo HYB-77201 Matt Embossed Surface Chai HYB-77206

TECHNICAL Wear Layer

SPECIFICATION





Frappé

Matt Embossed Surface

Marocchino

HYB–77103 Matt Embossed Surface





Macchiato

HYB-77106 Matt Embossed Surface

Matt Embossed Surface


Dimension	Length
	Width
	Total Thickness
	Wear Layer Thickness
	Underlay Thickness
Bevel	
Joining System	
Supplied	Box Size
	Weight
Slip Resistance	
Impact Sound Reduction (AS ISO 717.2 – 2004)	L'nTw
	FIIC
	AAAC

UV Coating

1800 mm
228 mm
9 mm
0.5 mm
2 mm
4-Sided Micro Bevelled Edges
Licensed Click System
1.6416 m ² / 4 Panels
24 kg
P4
45
64
5 Star

The acoustic test shown above carried out 20 Jan 2021 by KOIKAS Acoustic Pty

Ltd occurred on a 200-220mm reinforced concrete slab. To view our full testing report, please request by email.

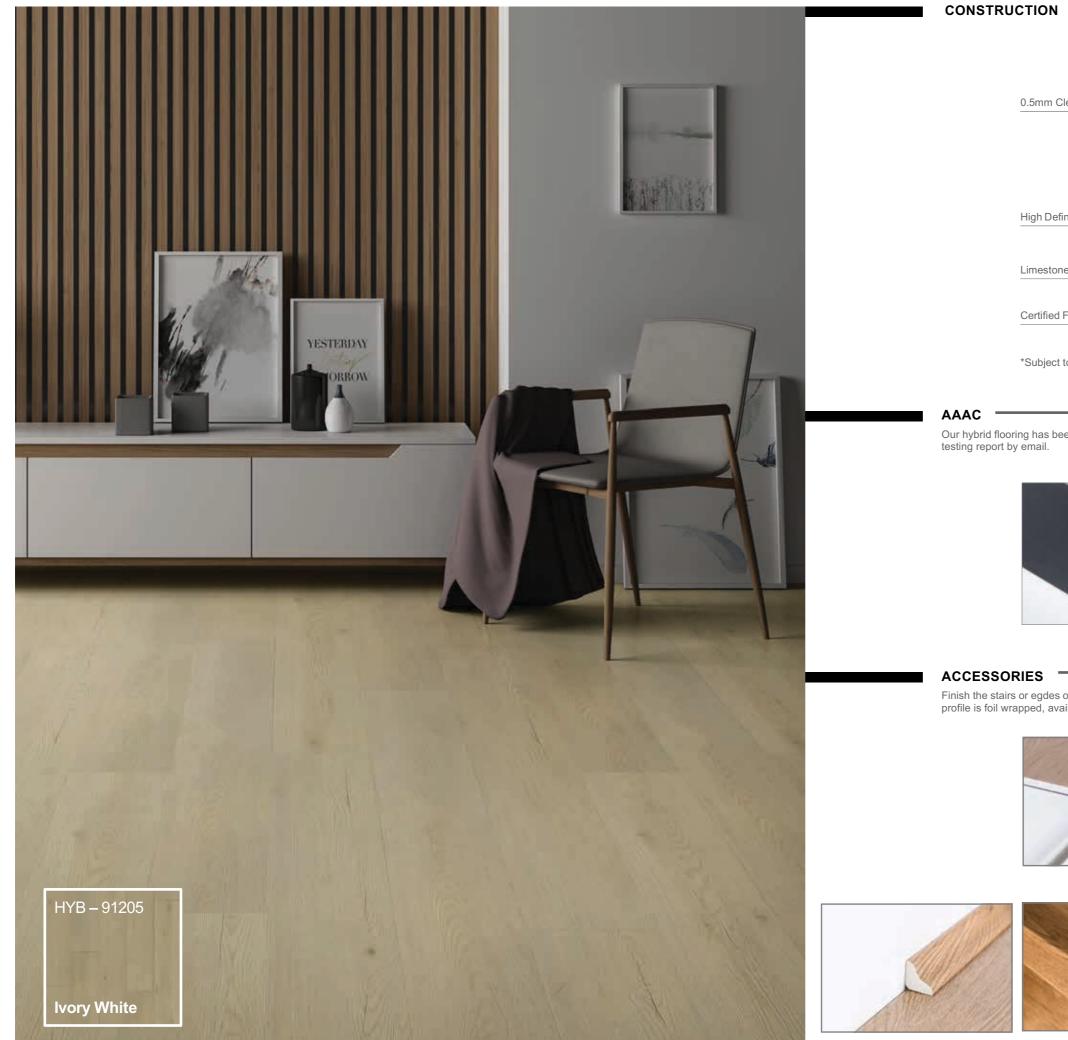

Clear PVC Embossed Wear Layer	A PRINTER AND A
finition Decorative Layer	
ne and PVC Composite Core	
	•
Foam Backing Attached	
	•

*Subject to proper installation and maintenance.

Our hybrid flooring has been tested to ensure acoustic privacy compliance. Please view our full testing report by email.



AAAC Star Rating	FIIC	L'nTw
2 Star	45	65
3 Star	55	55
4 Star	60	50
5 Star	65	45
6 Star	70	40

Finish the stairs or egdes of your Hybrid floor perfectly with our matching waterproof profiles. Each profile is foil wrapped, available for the entire range.



▲ T-MOULDING



▲ REDUCER



▲ STAIR NOSE



MAINTENANCE GUIDE

maintenance tips.

Prevent scratches and dents

Place doormats at all entry and exit points of your home. This helps prevent dents and fine scratches caused by sand, dirt and stones. Be sure to clean your mats regularly.

Fit all movable pieces of furniture with gliders and felt pads.

Avoid using steel wool, nylon scouring pads, scouring powder or abrasive cleaners on your hybrid floor.

Avoid accidents

Never apply oil, wax, soap or polishing products onto your hybrid floor. They may leave a dull finish, and also make it slippery.

Keep stains at bay

Only use woven or vinyl-backed mats marked non-staining or colourfast on your hybrid floor.

Some latex and rubber products—like the ones used as backing for mats and rugs, protective foot padding for stools, and wheelchair and trolley wheels-may leave permanent yellow stains on your floor.

If you cannot avoid using such materials, stick with darker colours to make the effect less noticeable.

While hybrid floors are designed to repel most types of spilled liquids, it is still best to clean spillage up with a dry piece of cloth and recommended cleaning solution immediately.

WARRANTY

warranty.

Our products are guaranteed to be delivered free from defects in material and workmanship and are warranted in their original manufactured condition. Gloss reduction and scratches caused by regular traffic are not covered by warranty. Please contact our sales representative to view full warranty wording, terms and conditio



Keep your Hybrid Floor looking its best for longer with these

Prevent discoloration

Exposure to natural and excess artificial light may cause your hybrid floor to appear whiter than areas normally covered by furniture or rugs. To fix this, simply expose the covered areas to light. Everything should even out after a couple of weeks.

Keep your hybrid floor clean

Clean your floor once per week using a combination of water and a PH neutral cleaning agent.

Be sure to check the manufacturer's instructions prior to using any kind of cleaning product, and always apply such substances onto a piece of cloth instead of directly onto the floor.

Daily cleaning can be done using a vacuum cleaner or soft, dry broom.

Fix dings and scratches

Remove minor scratches and nicks by cleaning and coating the affected area with furniture scratch cover oil.

Our hybrid flooring is subject to a 20-year residential (domestic) wear warranty, 3-year commercial warranty (by request) and lifetime structural

STYLETIMBER